


AK1-Y Series

Axial Leaded – 1kA

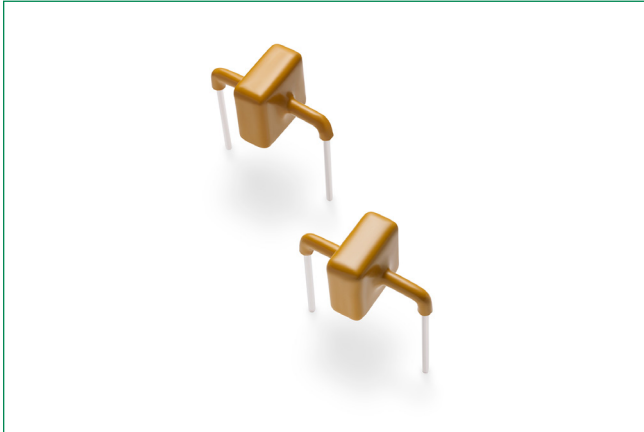

Agency Recognitions

| Agency | Agency File Number |
|--------|--------------------|
| | E128662 |

Maximum Ratings and Thermal Characteristics


($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--------------------------------------|-----------|------------|------------------|
| Operating Storage Temperature Range | T_{STG} | -55 to 150 | $^\circ\text{C}$ |
| Operating Junction Temperature Range | T_J | -55 to 125 | $^\circ\text{C}$ |
| Current Rating ¹ | I_{PP} | 1 | kA |

Note:

1. Rated I_{PP} measured with 8/20 μs pulse.

Functional Diagram



Descriptions

The AK1-Y series of high power TVS diode is specially designed for meeting severe surge test environment of both AC and DC line protection applications. It features a very fast response and ultra low clamping characteristics as compared to MOVs (Metal Oxide Varistors). These AK components can be connected in series and / or parallel to create a very high surge current protection solution.

Features & Benefits

- Recognized to UL 497B as an Isolated Loop Circuit Protector
- Both reflow and wave soldering capable
- Very low clamping voltage
- Ultra compact: less than one-tenth the size of traditional discrete solutions
- Sharp breakdown voltage
- Low slope resistance
- Bi-directional
- IEC 61000-4-2 ESD 15kV(Air), 8kV (Contact)
- Symmetric in leads width for easier soldering during assembly.
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- UL Recognized compound meeting flammability rating V-0
- Halogen-free and RoHS compliant
- Glass passivated junction
- Pb-free E4 means 2nd level interconnect is Pb-free and the terminal finish material is silver

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Part Numbers | Part Marking | Standoff Voltage (V_{SO}) Volts | Max. Reverse Leakage (I_R) @ V_{SO} μA | Typical I_R @ 85°C (μA) | Reverse Breakdown Voltage (V_{BR}) @ I_T | | Test Current I_T (mA) | Max. Clamping Voltage V_{CL} @ I_{PP} Peak Pulse Current (I_{PP}) (Note 1) | | Max. Temp Coefficient OF V_{BR} (%/ $^\circ\text{C}$) | Max. Capacitance 0 Bias 10kHz (nF) | Agency Approval |
|--------------|--------------|-------------------------------------|---|--|--|-----------|-------------------------|--|---------------|--|------------------------------------|-----------------|
| | | | | | Min Volts | Max Volts | | V_{CL} Volts | I_{PP} Amps | | | |
| AK1-076C-Y | 1-076C | 76 | 10 | 15 | 85 | 95 | 10 | 140 | 1,000 | 0.1 | 8.5 | X |
| AK1-380C-Y | 1-380C | 380 | 10 | 15 | 401 | 443 | 10 | 570 | 1,000 | 0.1 | 2.0 | X |
| AK1-430C-Y | 1-430C | 430 | 10 | 15 | 440 | 490 | 10 | 625 | 1,000 | 0.1 | 2.0 | X |

Note: Using 8/20 μs wave shape as defined in IEC 61000-4-5.

AK1-Y Series

Axial Leaded – 1kA

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1:
Peak Power Derating

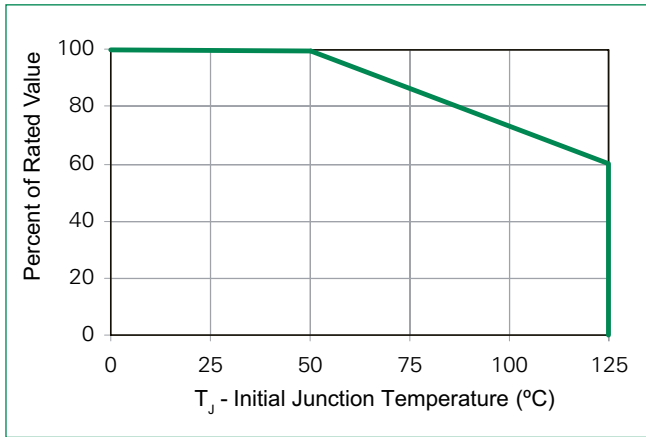


Figure 2:
Typical Peak Pulse Power Rating Curve

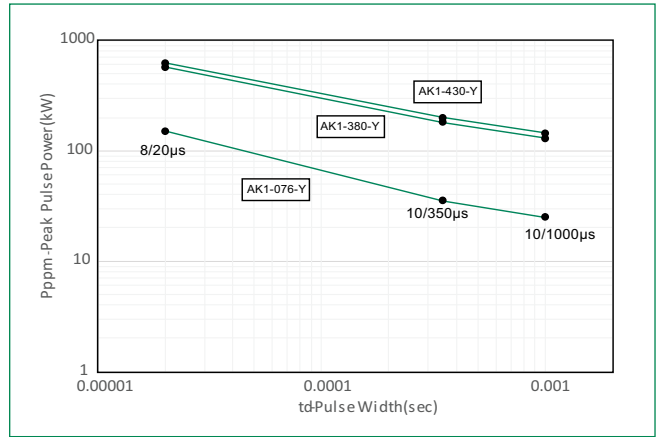


Figure 3:
Typical VBR Vs Junction Temperature


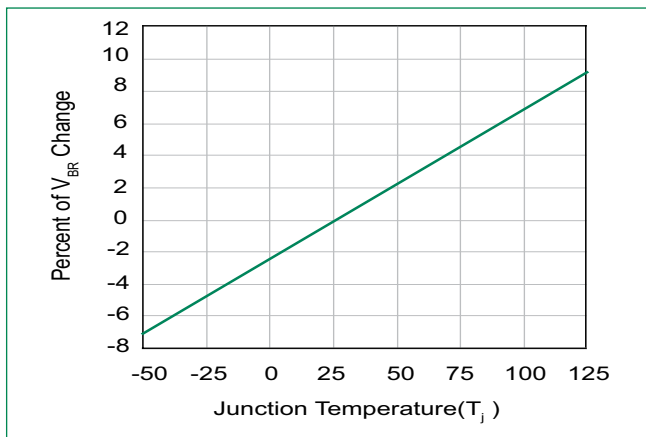


Figure 4:
Pulse Waveform

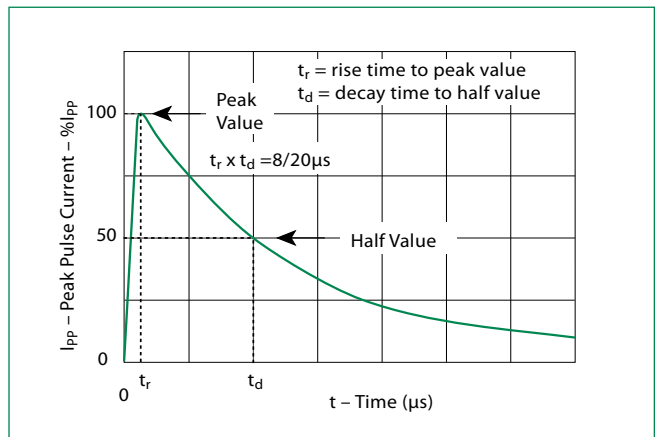


AK1-Y Series

Axial Leaded – 1kA


Soldering Parameters

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 120 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/second max |
| $T_{s(max)}$ to T_A - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Time (min to max) (t_r) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 30 seconds |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 260°C |

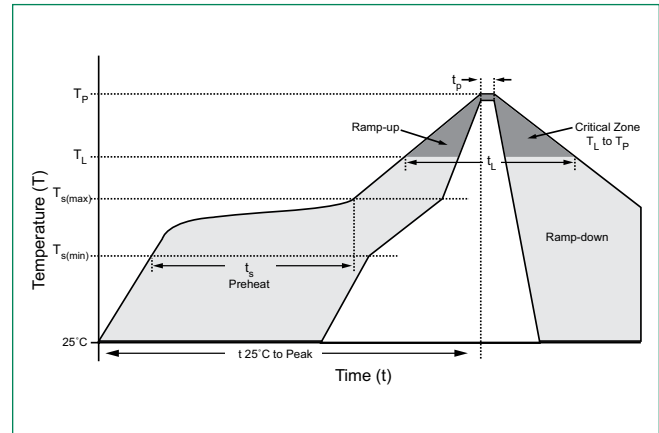

Flow Soldering (Solder Dipping)

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 140°C |
| | - Temperature Max ($T_{s(max)}$) | 160°C |
| | - Time to Pre-Heat Temp | 60 – 150 secs |
| Average ramp up rate to Pre-Heat Temp | | 5°C/second max |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Average ramp up rate (pre-heat to T_p) | | 5°C/second max |
| Time within actual peak Temperature Max | | 6 seconds |
| Ramp-down Rate | | 5°C/second max |

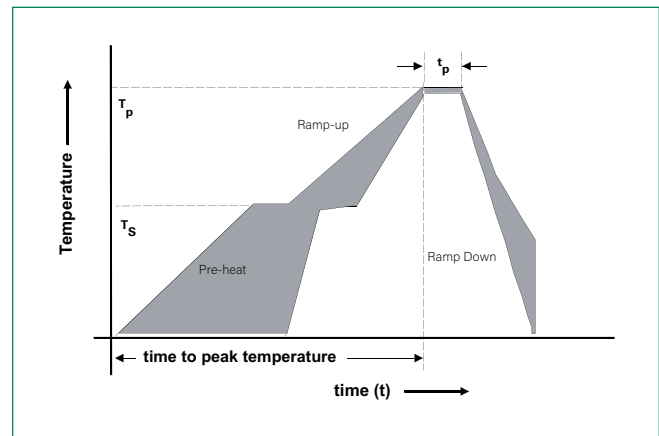


Physical Specifications

| | |
|-----------------|---|
| Weight | Contact manufacturer |
| Case | UL Recognized compound meeting flammability rating V-0 |
| Terminal | Silver plated leads, solderable per MIL-STD-750 Method 2026 |

AK1-Y Series

Axial Leaded – 1kA

Dimensions

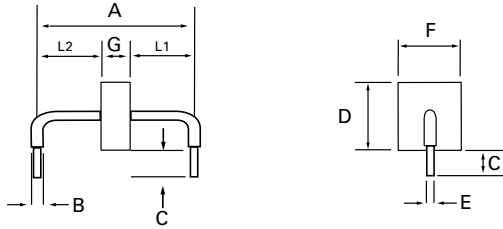


| Dimensions | Inches | Millimeters |
|-------------------------|---|----------------|
| A | 0.950 +/- 0.040 | 24.15 +/- 1.00 |
| B | 0.095 +/- 0.024 | 2.4 +/- 0.60 |
| C | 0.236 +/- 0.039 | 6.00 +/- 1.00 |
| D | 0.570 max. | 14.48 max. |
| E | 0.050 +/- 0.002 | 1.270 +/- 0.05 |
| F | 0.500 max. | 12.70 max. |
| G-076C-Y | 0.096 +/- 0.040 | 2.44 +/- 1.00 |
| G-380C-Y/ 430C-Y | 0.220 +/- 0.040 | 5.60 +/- 1 mm |
| L1/L2 | L1= L2 tolerance +/- 0.04 inch (1.0 mm) | |



Packing Options

| Part Number | Component Package | Quantity | Packaging Option |
|--------------|-------------------|-----------|------------------|
| AK1-XXXX-Y | AK Package | 56pcs/Box | Bulk |
| AK1-XXXX-Y12 | AK Package | 12pcs/Box | Bulk |

Part Numbering System

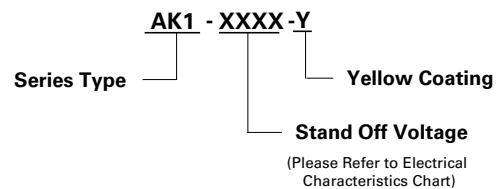

Part Marking System

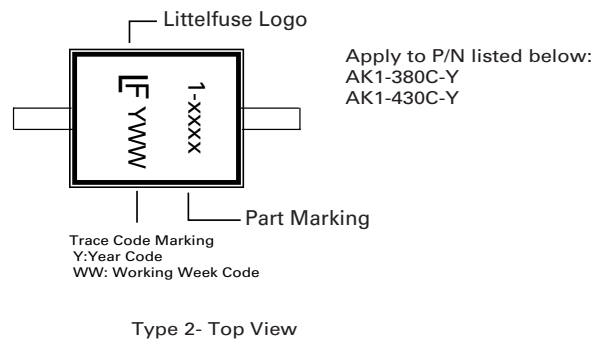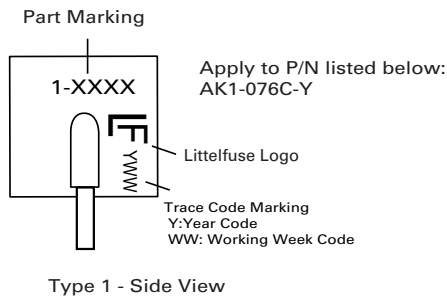

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.